



## Instruction Sheet

Thank you for purchasing your **BigStuff BT Lithium-Ion Bluetooth RS232 Adapter** from EFI Analytics. This Adapter has been preconfigured with the proper settings and tested for simple communication with your BigStuff3 controller.

To use, you must first pair your PC or Android based Phone or tablet with this Adapter.

On Android, go into Bluetooth Settings, and Scan for Devices


From a PC you must have built in Bluetooth support or a USB Bluetooth dongle. Select Add Device from Device Manager.

- Connect and Power the Adapter by turning on switch 8, you will then see a rapid flashing blue light
- Select BigStuffXX
- Enter the Pairing PIN

**Note: When you pair with this device you will be prompted for a PIN, use 1234**

### Features

- The No drivers are needed
- Configured and ready to use with a BigStuff3 Controller
- Multiple power supply, internal 450mA Lithium Battery, external 5V DC-IN.
- Supports AT command configuration in AT command mode.

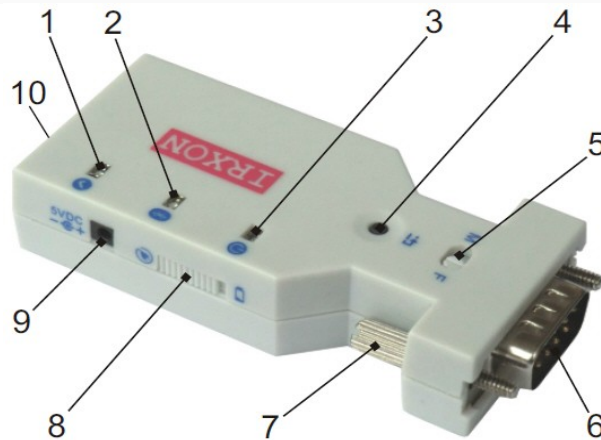

1. Connection Established LED (Green)
2. Bluetooth Status LED (Blue)
3. Power/Charging LED (Red)
4. AT Command Mode Button
5. DB9 Male/Female Slide Switch
6. RS232 Connector (DB9-Male)
7. Tightening Screws
8. Internal Battery Power Switch
9. External Power Connector
10. SMA Antenna (for Class1 Model)

If you experience difficulties, avoid resetting to factory defaults. Please contact us at [support@efianalytics.com](mailto:support@efianalytics.com)